

# Installation Instructions

## 安裝說明書


REAR STRUT BRACE  
後尾廂拉桿  
#Q0683

### Application 適用車型

MAZDA MX-5 MIATA 4th ND 2015-

### Components 內含配件

① Center bar 中間桿 .....	1pcs
② Bracket-RH 支架-左 .....	1pcs
③ Bracket-LH 支架-右 .....	1pcs
④ Bolt 螺絲 (M10X1.5-75) .....	2pcs
⑤ Nut 螺帽 (M10x1.5-17x10) .....	2pcs
⑥ Washer 華司 (20.8x10.7x2) .....	2pcs

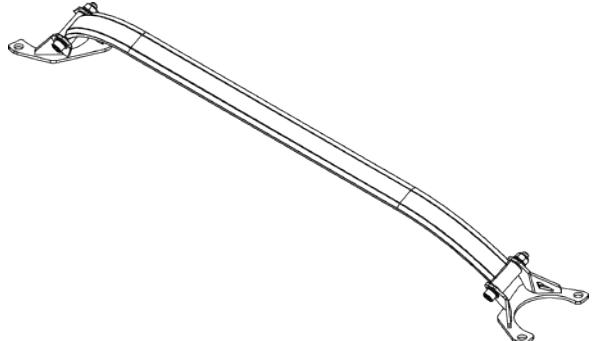

### Caution 注意事項

- Installation is recommended to be performed by licensed mechanics with necessary tools to ensure safety. Incorrect installation may cause injury, damage to the product or vehicle.  
安装建議由合格的技師及工具執行以確保安全，安裝錯誤可能對人員、產品及車輛造成傷害。
- Note the routing of wires and cables before installation, or please refer to factory manual.  
安裝前請事先記下線路的安裝路徑及位置以維持原廠配置，有疑問時請參考原廠手冊。
- Tighten bolts and nuts firmly by using handtools, and with specified torque if mentioned.  
安裝過程請使用手動工具確實鎖緊螺帽及螺絲，如有特別註明請依照說明指示的扭力上鎖。

### Instructions 安裝說明

1. Remove the factory trunk trims panels, circled part trim bracket and fuel pipe protector to access the strut towers.  
拆下行李箱內隔板以及圈起處的隔板支架和油管護蓋後即可看到避震塔。



3. Install the center bar to the brackets on both sides using supplied M10 hardwares.  
使用M10配件，將中間桿安裝至兩側支架。



2. Remove the strut mount nuts to install the RH & LH side brackets to the strut towers. Then reinstall the nuts to secure the brackets.  
(Torque: 45~55Nm)  
拆下固定ECU支架的螺帽及左避震器上座螺帽，將原廠的避震塔支架移除。  
(上鎖扭力值: 45~55Nm)



\* Trimming is required to reinstall the interior panels.  
若要將行李箱隔板裝回，須修改切除隔板與拉桿干涉的部分。



► Illustration of installed state  
安裝完成示意圖